

GTI[®] CHAIN ACTUATOR


G5-X-GS ELECTRIC INCLINE DOUBLE LINK CHAIN ACTUATOR

Dimension	Specification
P73-07	P92





(Application of Side Hung Window)

- Tested to BS EN12101-2:2003 Part 2 Smoke Ventilation Annex G
- Electronic overload cutoff, limit stop and low noise operation
- Standard with Stainless chain
- There have the rebound function to mitigate the aluminum frame become deformed and to increase the adhesive tape life time
- Various strokes or tailor-made stroke is available
- Easy installation on window with or without window sill
- Voltage supply 24V DC \pm 10%
- Endurance tests (50,000 cycles) are carried out
- Lock force in static motion is 6,000N
- Max push and pull force: 300N

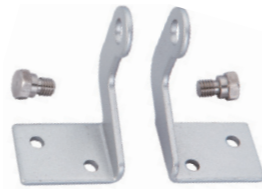

Fixed Bracket

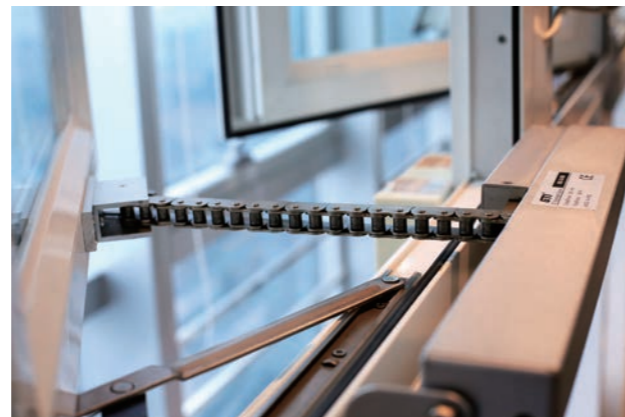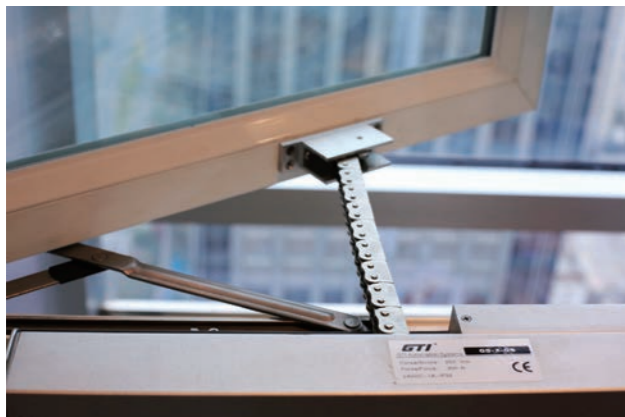

UAE
Central Market

